

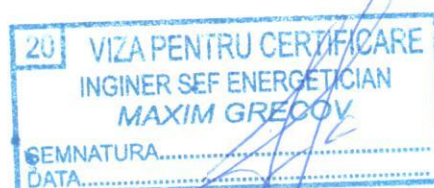



FISA TEHNICA MOTOR ELECTRIC FIR 3 TRACTARE 11KW

Piece	1 pce	
Type	4KTC 160 L-6	
Speed	965 rpm	
Power	11,0 kW	
Form	IM B5; (flange mounted without rain canopy)*	
Voltage	D 400V 50 Hz	
Winding	winding with 6 leads	
Flameproof motor	II2G Ex d II CT4 Gb	
Temperature range	T4	
Mechanical protection	IP 55	
Housing	material	Casting
version		
Isolation class	F	
Temperature rise	B	
Duty	S1	
Cooling	IC 411 TEFC	
Paint	RAL 5010	
Thermal protection	With 3-PTC thermistor (145°C)	
Ambient temperature	-20°C / +40°C	
Cable entries	2 x M40x1,5 + 1 x M20x1,5 (without cable glands)	
Certificate	BVS 13 ATEX E 125 X	

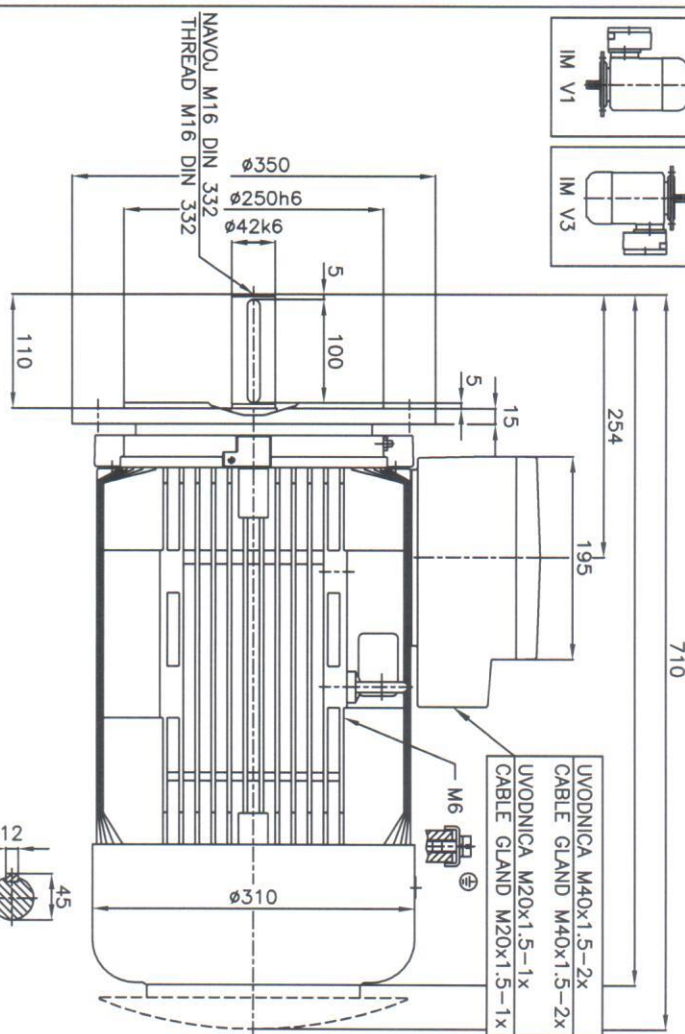




PRIKLJUČNA OMARICA Exe/TERMINAL BOX Exe

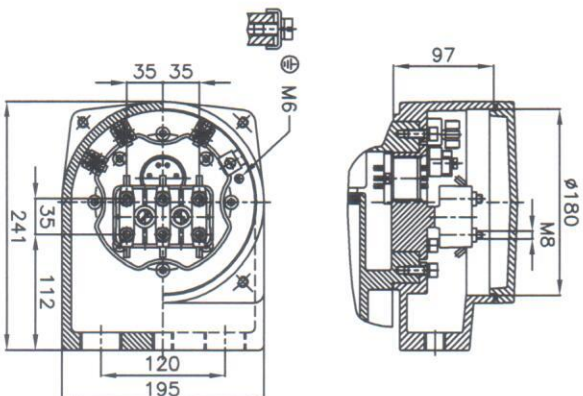

PRIKLJUČNA OMARICA Exd/TERMINAL BOX Exd

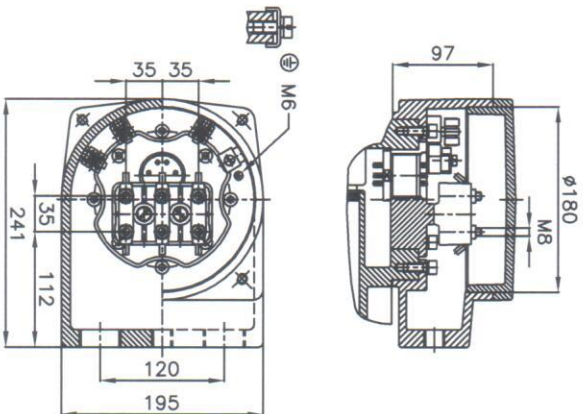

Kabel za PTC 1.5mm²
Cabel for PTC 1.5mm²
Kabel max. 16mm²
Cabel max. 16mm²



BARTEC-VARNOST



MOTOR
MOTOR
OBLIKA
TYPE OF CONSTRUCTION

4KTC160 M.L

Merilo/Scale 1:1

MERE V mm
DIMENSIONS IN mm

Date: 2014-10-07

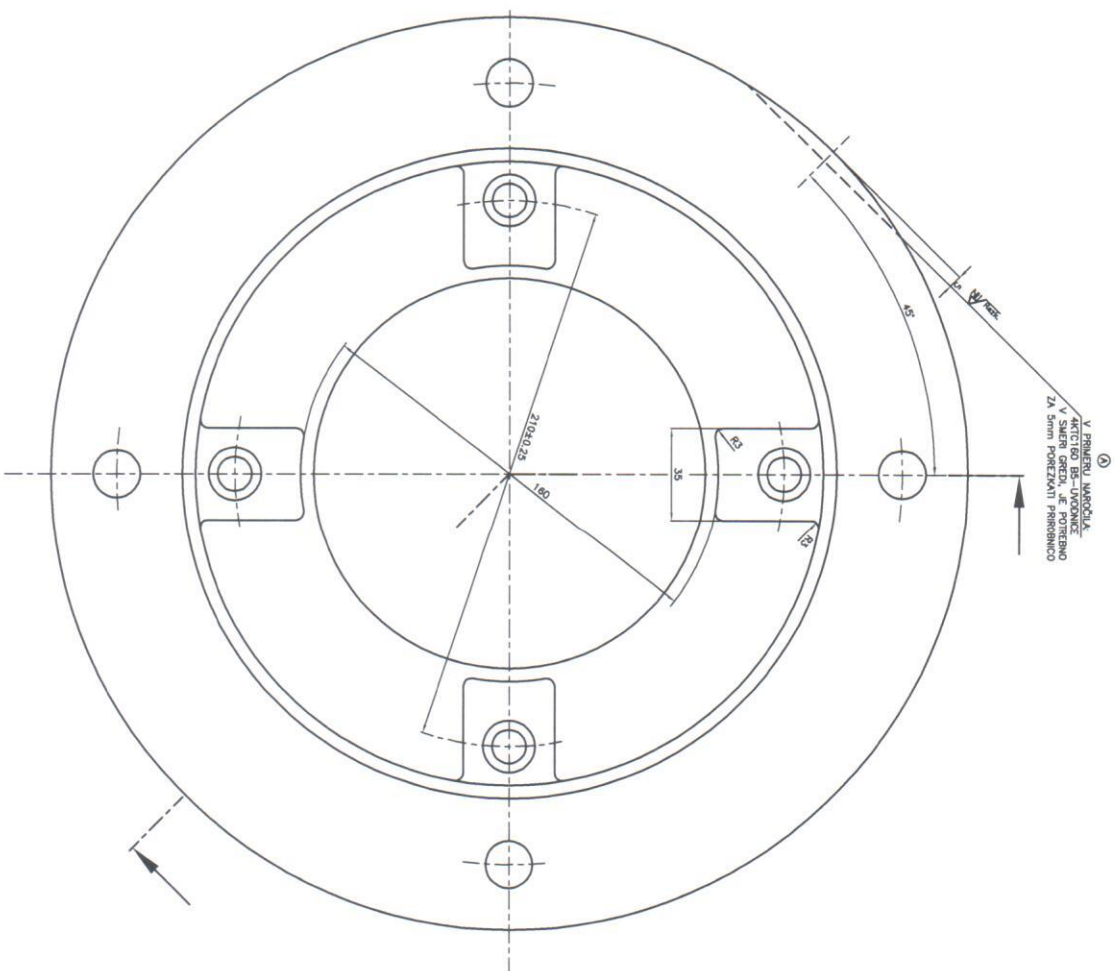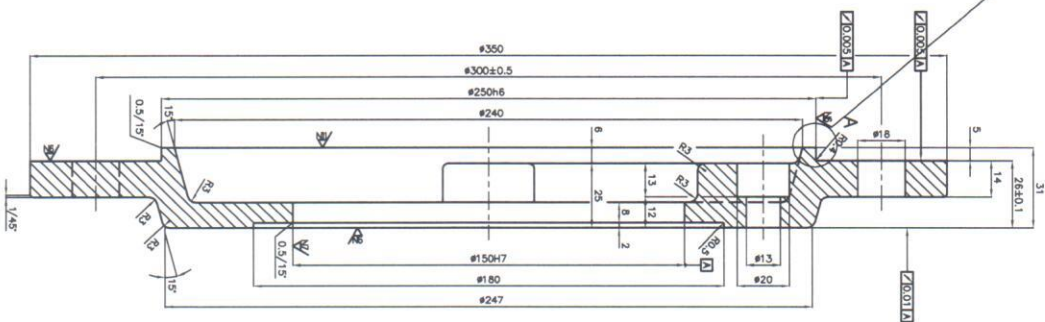

ZAHTEVE ZA ODLITEK		
REQUIREMENTS FOR CASTING		
MATERIAL	EN-GJL-200	DIN EN 1561
STANDARD DIMENSION/ STANDARD OF DIMENSION		EN ISO 8063-3
ODLITEK MORBA BITI PREDJAVAN IN PREDJAVNO S TITELJNO BARVO		
SAND BLOWING SURFACE PROTECTED WITH TOP COATING SYSTEM		

150H7	+0.040 0	Form/Size Euler buckles	A
250h6	0 -0.029	Code of prod./ Name/Notes	

Bar/From to bar	Rollfill	Internal	Length
	5 Rows/2	6520	1.1
Profile/Description	Standard Aluminat	Aluminum	
Color/Finish	5 Color	Exterior/Interior	
Use Ref./Notes if any	1 Color		
Unit/Type	01		
Model/Notes	01		
Price of material	\$/sq.		
Quantity/Date	1997-10-30	Quantity/Date	

Na odčitku je odčitano število: 273084.

B	1x	2015-02-02	Bošelj	Dodano poizetje na premeru 250	Rapovž	2015-02-02
A	1x	2012-02-22	Bošelj	Poročilo prisilnice za širn (posebe naročilo)	Rapovž	2012-02-22
Prilož	Sorazmerno	Datum	Ime	Opis sorazmerno	Dobitelj	Datum