



ENDS

Polypropylene based (PP) technopolymer, black colour, matte finish.

AXIS AND ROTOR PROPELLER

Polypropylene based (PP) technopolymer, red colour.

TUBULAR WINDOW

PYREX® glass, high-resistance, also suitable for use with glycol-based solutions.

Maximum visibility of the flow from all angles.

TIE RODS

Nickel-plated brass.

PACKING RINGS

NBR synthetic rubber.

THREADED FITTINGS

Brass bosses with cylindrical gas thread according to UNI ISO 228/1.

MAXIMUM CONTINUOUS WORKING TEMPERATURE: 100° C.

FEATURES AND APPLICATIONS


The indicator can be mounted in any position. In case of mounting on rigid tubes, it is recommended to place the indicator perfectly aligned with the tubes. The indicator operates with two-way flow.

For rotating the propeller it is required a minimum fluid flow rate (Q^{**}) depending on the type of fluid and its viscosity (shown in cSt, see table)

SPECIAL EXECUTIONS ON REQUEST

- AISI 316 stainless steel bosses.
- Bosses with NPT conical threads.
- Axis and rotor propeller in blue colour.

* Registered trademark by Corning Inc.

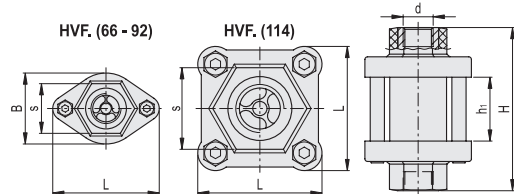

Code	Description	d	H	L	B	h	s	Q*	P#	Q**	Q**	Q**	ΔP##	
								max l/min	max Bar	l/min H ₂ O	l/min 0÷40 cSt	l/min 41÷150 cSt	max Bar	
111301	HVF.66-1/4	1/4	66	44	27	22	20	10	25	0.6	2.5	3.5	0.15	74
111311	HVF.92-3/8	3/8	92	60	40	36	28	20	15	1.2	3	4	0.25	176
111321	HVF.92-1/2	1/2	92	60	40	36	28	40	15	1.2	3	4	0.3	167
111331	HVF.114-3/4	3/4	114	70	-	46	46	60	12	2.1	3.7	5	0.17	663
111341	HVF.114-1	1	114	70	-	46	46	80	12	2.1	3.7	5	0.15	667

* Maximum flow rate. # Maximum pressure

** Minimum flow rate to start the rotor for fluids of different viscosity

Pressure drop due to the indicator presence

